



WrapidSeal™ Manhole Encapsulation System


Canusa is a leading manufacturer of specialty pipeline coatings which, for over 30 years, have been used for sealing and corrosion protection of pipeline joints and other substrates. Canusa high performance products are manufactured to the highest quality standards and are available in a number of configurations to accommodate your specific project applications.

Product Description

WrapidSeal™ is a wrap around heat shrinkable sheet that has been specifically designed for protection of buried and exposed manhole structures. WrapidSeal™ is supplied in bulk rolls of varying widths and consists of a crosslinked polyolefin backing, coated with a protective heat activated adhesive. A separate closure is used to create a complete sleeve with the adhesive effectively bonding to the substrate, providing corrosion protection and adhesion for the impermeable backing.

Long Term Protection


Once installed, the system creates a barrier to water infiltration and effectively protects the manhole support structure and frame from ground moisture, preventing corrosion and freeze-thaw damage. In below grade vaults or concrete lines, WrapidSeal™ is used to minimize water infiltration, reducing dewatering costs and loads on waste water treatment facilities.

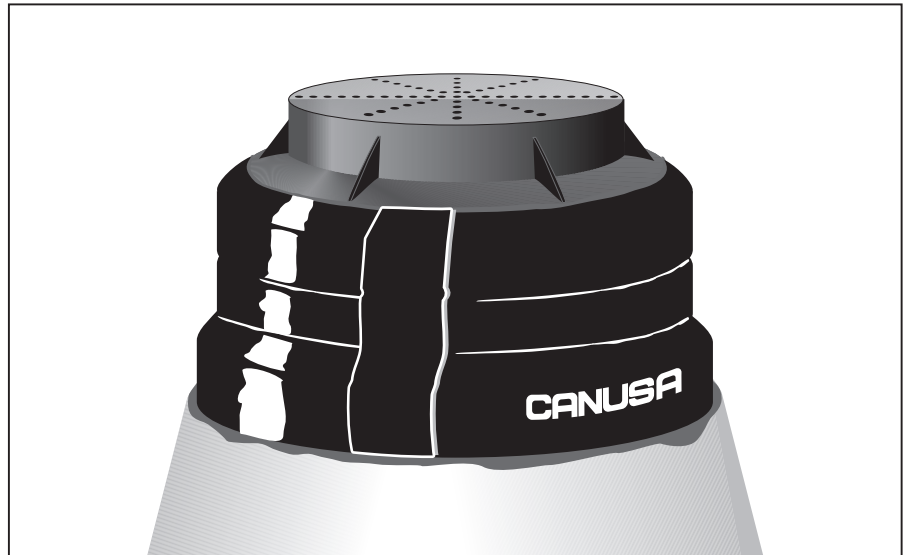

Features & Benefits

- **Heat activated, high shrink membrane.**
Torch applied, shrinks to fit profile.
- **High tensile & elongation.**
Accommodates movement.
- **Excellent abrasion resistance.**
Tough product, resists soil stress.
- **Bulk roll.**
Fits any size manhole.
- **Complete coverage.**
Reduces ground water infiltration.
- **Provides corrosion protection.**
Extends service life.

Typical Applications

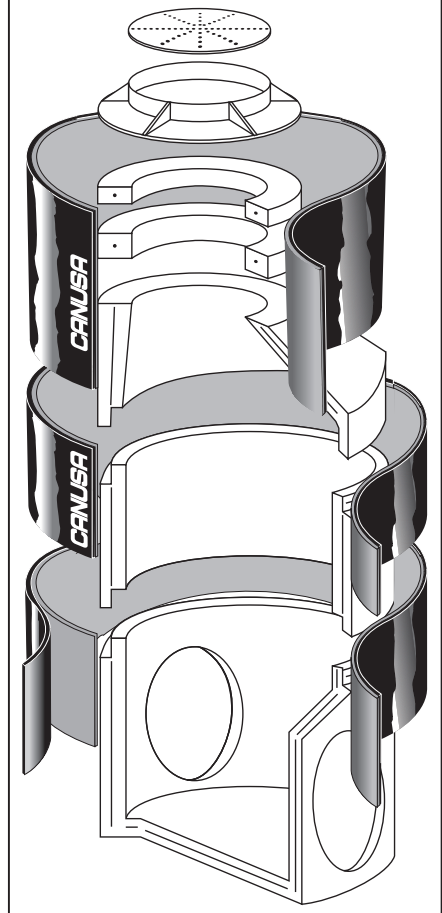


WrapidSeal™

The product selection chart shown here is intended as a guide for standard applications. Consult your Canusa representative for specific projects or unique applications.

Material Requirements

Size the sleeve such that it wraps around the perimeter of the manhole base plus 150mm (6") overlap. See the table below for length of WrapidSeal™ required.

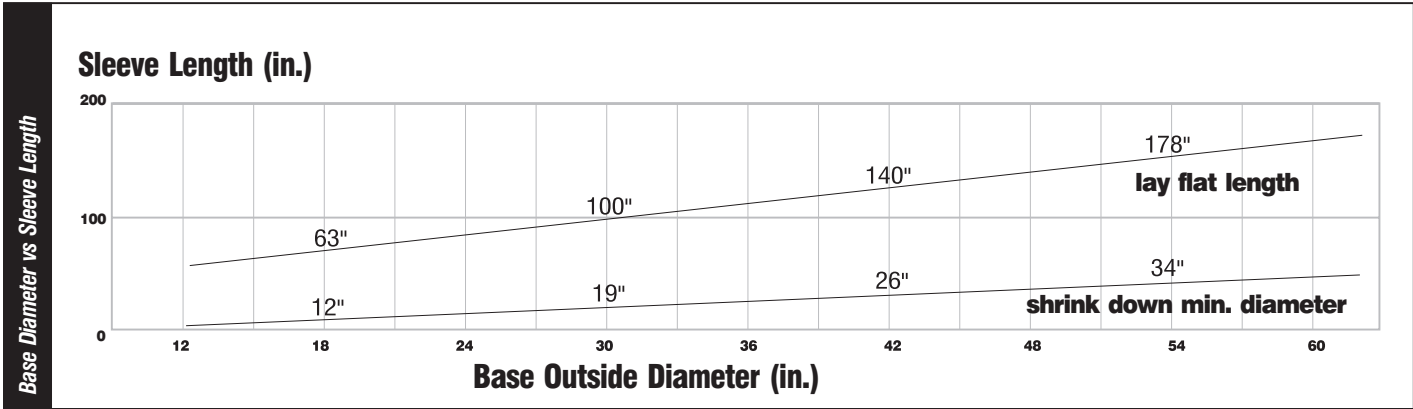

Typical Product Properties

	Test Standard	Unit	Results
Adhesive	Softening Point	ASTM E28	°C (°F)
	Lap Shear Strength	DIN 30 672	N/cm ² (psi)
Backing	Tensile Strength	ASTM D638	MPa (psi)
	Elongation	ASTM D638	%
	Hardness	ASTM D2240	Shore D
	Abrasion Resistance	ASTM D1044	mg
Sleeve	Peel Strength	ASTM D1000	N/cm (pli)
	Water Absorption	ASTM D570	%
	Low Temp. Flexibility	ASTM D2671D	°C (°F)

Ordering Information & Product Dimensions

WrapidSeal™ is supplied in 12" or 18" widths in 50' long bulk rolls. Closure seals and primer are ordered separately.

Specify the width of WrapidSeal™ required and the number or length and size of closure seals.

Applications

Above Grade

- Prevents Water Infiltration
- Accommodates Ground Movement
- Protects Against Degradation

Below Grade

- Prevents Water Infiltration
- Resists Soil Stress



Canada

CANUSA - CPS
a division of Shaw Industries Ltd.
25 Bethridge Road
Rexdale, Ontario
M9W 1M7
Canada
Tel: +1 (416) 241-0128
Fax: +1 (416) 241-6890

U.S.A./Latin America

CANUSA
a division of Shaw Resource Services Inc.
2408 Timberloch Place
Building C-8
The Woodlands, Texas
77380, U.S.A.
Tel: +1 (281) 367-8866
Fax: +1 (281) 367-4304

Europe/Middle East

CANUSA SYSTEMS LTD.
CPS Division
Darby House
Bletchingley Road
Merstham, Surrey
RH1 3DN, England
Tel: +44 (1737) 644014
Fax: +44 (1737) 645800

Asia/Pacific

CANUSA
a division of Shaw Pipeline Services Pte.Ltd.
896 Dunearn Road #04-04A
Sime Darby Centre
589472, Singapore
Tel: ++65-469-9866
Fax: ++65-469-2632